



TANK MOUNTED DIFFUSER - TMAD

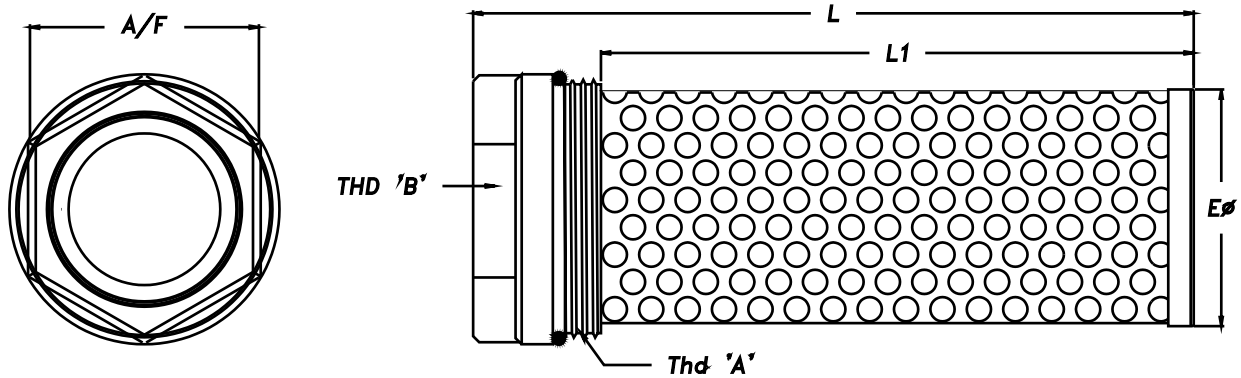

- TANK MOUNTED DIFFUSER
- SIDE WALL OR TANK TOP MOUNTING
- PERFORATED STEEL TUBE
- DIE CAST ALUMINIUM BUSHING WITH 'O' Ring (SAE THREADS)
- MAX.TEMP 80° C



Series	Thread Dim. A x Dim. B UN (2A) X UN (2B)	LPM / GPM Rating	Dimensions			A / F	WT KGS
			L	L1	E		
TMAD - 03	1-1/16"-12 x 3/4" - 16	38 / 10	101.6	67	20.0	31.5	0.10
TMAD - 05	1-5/16"-12 x 3/4" - 16	76 / 20	137.0	102	28.5	31.5	0.12
TMAD - 10	1-5/8" -12 x 1-1/16" - 16	132 / 35	208.0	172	36.0	38.0	0.18
TMAD - 15	1-7/8" -12 x 1-5/16" - 16	208 / 55	208.0	172	42.0	46.0	0.23
TMAD - 20	2-1/2" -12 x 1- 5/8" - 12	306 / 95	228.6	194	54.0	54.0	0.36
TMAD - 30	3-3/8" -12 x 1- 7/8" - 24	795 / 210	223.5	184	78.0	63.0	0.55
TMAD - 40	3-3/8" -12 x 2- 1/2" - 32	1760 / 460	236.2	190	78.0	76.0	0.55

MODEL NO CHANGED WEF JAN 12

MODEL CODE : ASSEMBLY

TMAD	- 15	
SERIES	SIZE	SAE STD THD 'A' - THD 'B'
TMAD	03	12S - 08S
	05	16S - 08S
	10	20S - 12S
	15	24S - 16S
	20	32S - 20S
	30	48S - 24S
	40	48S - 32S

Recommended Weld Flange

To Be Ordered
Separately

TWF - 12 U
TWF - 16 U
TWF - 20 U
TWF - 24 U
TWF - 32 U
TWF - 48 U
TWF - 48 U

CONTACT FACTORY FOR OPTIONAL FEATURE