


TANK MOUNTED DIFFUSER - TMSUD

- TANK MOUNTED DIFFUSER
- SIDE WALL OR TANK TOP MOUNTING
- PERFORATED STEEL TUBE
- DIE CAST ALUMINIUM BUSHING WITH O Ring (SAE THREADS)
- MAX.TEMP 80° C

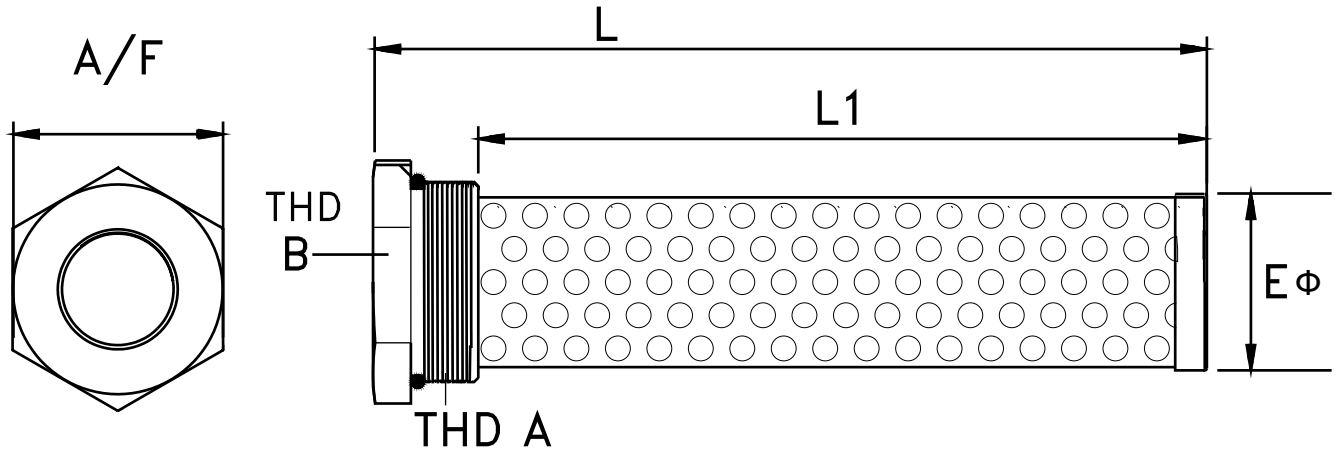

Series	Bushing Size Dim. A x Dim. B UN (2A) X UN (2B)		Flow GPM / LPM	Dimensions				WT KGS
	L	L1		E	A / F			
TMSU - 03	1 - 1/16" - 12 X	3/4" - 16		133.5	108	24.0	31.75	
TMSU - 05	1 - 5/16" - 12 X	3/4" - 16		137.0	107	28.5	38.00	
TMSU - 10	1 - 5/8" - 12 X	1 - 1/16" - 12		200.0	174	36.0	46.00	
TMSU - 15	1 - 7/8" - 12 X	1 - 5/16" - 12		210.0	175	42.0	55.00	
TMSU - 20	1 - 7/8" - 12 X	1 - 5/8" - 12		210.0	175	42.0	55.00	
TMSU - 30	2 - 1/2" - 12 X	1 - 5/8" - 12		210.0	175	54.0	70.00	
TMSU - 40	3 - 3/8" - 12	x 2 - 1/2" - 12		210.0	172	78.0	62.00	

MODEL CODE : ASSEMBLY

TMSUD	- 10		
SERIES	7	SIZE	
		SAE STD THD 'A' THD 'B'	
TMSUD		03	12S - 08S
		05	16S - 08S
		10	20S - 12S
		15	24S - 16S
		20	24S - 20S
		30	32S - 20S
	40	48S - 32S	

Recommended Weld Flange

To Be Ordered
Separately

- TWF - 12 U
- TWF - 16 U
- TWF - 20 U
- TWF - 24 U
- TWF - 24 U
- TWF - 32 U
- TWF - 48 U

CONTACT FACTORY FOR OPTIONAL FEATURE